


直径固定型

产品特点: 直柱型的标准形状, 价格较低。

BG
直径固定型

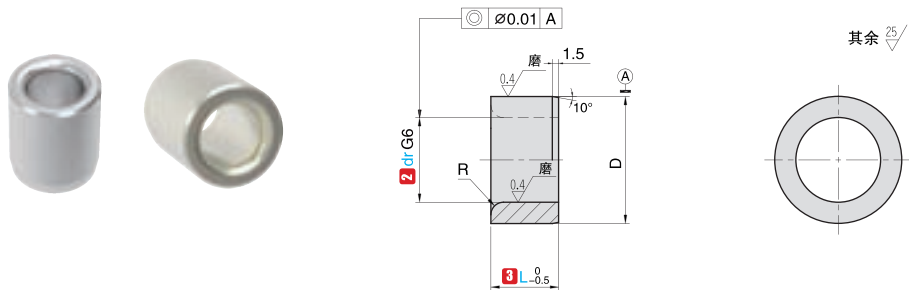

订购编号示例 1 代号 - 2 dr - 3 L - 4 D 公差 - 5 材料代码
BG - 6 - 10 - p6 - M01

1 代号	主要尺寸											D	R			
	2 dr	3 L 选择														
BG	2	5	6	8	10	12						5	0.8			
	3	5	6	8	10	12						7				
	4	5	6	8	10	12	15	16	20			8				
	5	5	6	8	10	12	15	16	20				10	1		
	6	5	6	8	10	12	15	16	20	25			10			
	8	5	6	8	10	12	15	16	20	25			12			
	10		6	8	10	12	15	16	20	25			15	2		
	12			8	10	12	15	16	20	25	30				18	
	13				10	12	15	16	20	25	30				22	
	15					12	15	16	20	25	30				25	
	16						12	15	16	20	25	30			26	
	20						12	15	16	20	25	30			30	3
	25							16	20	25	30	35			35	

▲ 无电解镀镍产品的 dr 尺寸 2~6 的公差为 H7。
▲ 与 m6 型相比, p6 型的内径收缩较大, 因此在进行孔加工时请予以注意, 尺寸变化请参照技术信息。

2 dr	dr 公差			
	无表面处理		无电解镀镍	
2	G6	+0.008 +0.002	H7	+0.010 0
3				
4				
5		+0.012 +0.004		+0.012 0
6				
8	G6	+0.014 +0.005	G6	+0.014 +0.005
10				
12				
13		+0.017 +0.006		+0.017 +0.006
15				
16				
20		+0.020 +0.007		+0.020 +0.007
25				

D	4 D 公差	
	p6	m6
5	+0.020 +0.012	+0.012 +0.004
7		
8	+0.024 +0.015	+0.015 +0.006
10		
12		
15	+0.029 +0.018	+0.018 +0.007
18		
22		
25	+0.035 +0.022	+0.021 +0.008
26		
30		
35	+0.042 +0.026	+0.025 +0.009

代号	类型	5 材料代码	材质	表面处理	硬度
BG	直径固定型	M01	9CrWMn	-	淬火硬度 60HRC~
		M10	9CrWMn	无电解镀镍	淬火硬度 60HRC~