


带挡圈嵌入式

产品特点：将端部嵌入固定板上（G7）精度的孔中进行定位的类型。维护时的重复定位精度高。

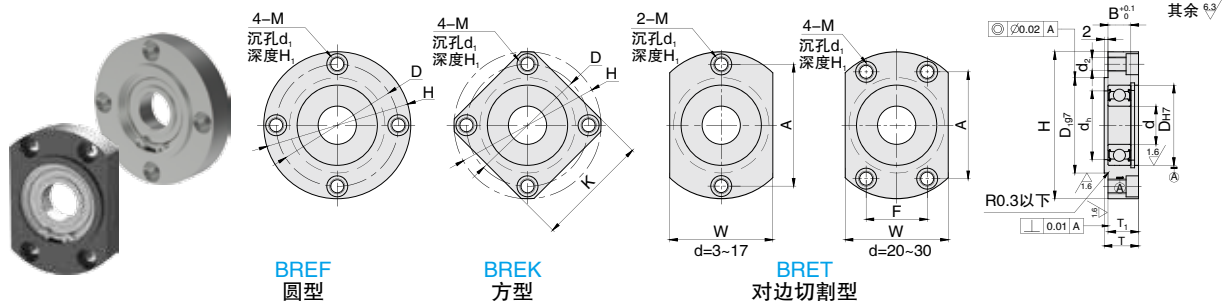

对安装孔进行螺纹及沉孔加工，以便能从正反两面进行安装。

订购编号示例	1 代号	-	2 轴承型号	-	3 材料代码
	BREF	-	6800-2Z	-	A

1 代号	2 轴承型号	d	D _{H7}	D _{1g7}	D ₁ 公差	H	B	T	T ₁	d _h	D	K	A	W	F	d ₁	H ₁	M(粗牙螺纹)(d ₂)	材料规格有无		
																			轴承：钢 固定座：45#	轴承：钢 固定座：A2017	轴承：不锈钢
BREF BREF BRET	623-2Z	3	10	14	-0.006	33	4	9	7	7	24	27	24	16	-	6.5	3.4	M4 (3.3)			-
	624-2Z	4	13	17	-0.024	35	5	10	8	9	26	28	26	18	-						-
	605-2Z	5	14	18		36	5	10	8	10	26	30	26	20	-						-
	625-2Z	5	16	20		38	5	10	8	12	28	31	28	22	-						-
	606-2Z	6	17	21		39	6	11	9	13	29	32	29	23	-						-
	626-2Z	6	19	24		41	6	11	9	15	31	34	31	25	-						-
	69/8-2Z	8	19	24	-0.007	41	6	11	9	15	31	34	31	25	-						-
	608-2Z	8	22	27	-0.028	45	7	12	10	18	35	36	35	29	-						-
	628-2Z	8	24	30		47	8	13	11	20	37	37	37	32	-						-
	6800-2Z	8	19	24		41	5	10	8	15	31	34	31	25	-						-
	6900-2Z	10	22	27		45	6	11	9	19	35	36	35	29	-						-
	6000-2Z	10	26	32	-0.009	50	8	13	11	22	40	39	40	34	-						-
	6200-2Z	10	30	36	-0.034	54	9	14	12	24	44	42	44	38	-						-
	6801-2Z	12	21	26	-0.007	44	5	10	8	17	34	35	34	29	-						-
	6901-2Z	12	24	30	-0.028	48	6	11	9	21	38	38	38	31	-						-
	6001-2Z	12	28	34	-0.009	52	8	13	11	24	42	40	42	36	-						-
	6201-2Z	12	32	38	-0.034	56	10	15	13	26	46	43	46	40	-						-
	6802-2Z	15	24	30	-0.007	47	5	10	8	20	37	37	37	32	-						-
	6902-2Z	15	28	35		57	7	12	10	25	45	45	45	37	-						-
	6002-2Z	15	32	38		60	9	14	12	28	48	46	48	40	-						-
	6202-2Z	15	35	42		64	11	17	15	29	52	49	52	44	-						-
	6903-2Z	17	30	36	-0.009	60	7	12	10	27	48	46	48	38	-						-
	6003-2Z	17	35	42	-0.034	66	10	16	14	31	54	50	54	44	-						-
	6203-2Z	17	40	48		72	12	18	16	34	60	54	60	50	-						-
	6804-2Z	20	32	38		60	7	12	10	28	48	46	38	40	29						-
	6904-2Z	20	37	45		69	9	15	13	34	56	54	51	47	24						-
	6004-2Z	20	42	50		77	12	18	16	36	64	59	56	54	32						-
	6204-2Z	25	47	54	-0.010	81	14	20	18	40	68	62	59	58	34	11	6.5	M8 (6.8)			-
	6805-2Z	25	37	45	-0.009	69	7	13	11	34	56	54	51	47	24				-	-	-
	6905-2Z	25	42	50	-0.034	77	9	15	13	36	64	59	56	54	32				-	-	-
	6005-2Z	25	47	54	-0.010	88	12	18	16	41	72	67	63	58	36	14	8.6	M10 (8.5)			-
	6205-2Z	25	52	60	-0.040	94	15	22	20	45	78	72	68	64	39				-	-	-
	6806-2Z	30	42	50	-0.009	77	7	13	11	36	64	59	56	54	32	11	6.5	M8 (6.8)			-
	6906-2Z	30	47	54	-0.010	88	9	15	13	41	72	67	63	58	36				-	-	-
	6006-2Z	30	55	62	-0.040	96	13	20	18	48	80	73	70	66	40	14	8.6	M10 (8.5)			-
	6206-2Z	30	62	70		104	16	23	21	55	88	79	77	74	44				-	-	-

材料说明

代号	类型	3 材料代码	材质		表面处理	附件
			轴承	固定座	固定座	挡圈
BREF BREF BRET	圆型 方型 对边切割型	A	钢	45#	四氧化三铁保护膜	弹簧钢
		B		45#	无电解镀锌	0Cr18Ni9
		C		A2017	本色阳极氧化处理	0Cr18Ni9
		E	不锈钢	A2017	本色阳极氧化处理	0Cr18Ni9
		F		0Cr18Ni9	-	0Cr18Ni9