


钢型・不锈钢型

轴
承

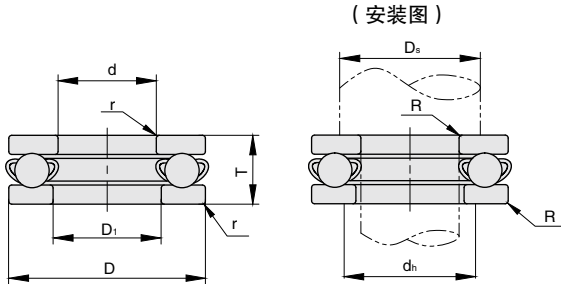

代号	类型	材质
R5 □	钢型	GCr15
RS5 □	不锈钢型	9Cr18Mo

订购编号示例

1 代号

R51201

1 代号		d	d 公差	D	D 公差	D ₁ (min.)	T	T 公差	r (min.)	基本额定负载				许用转速 rpm (参考)	安装尺寸			重量 g (参考)	
钢型	不锈钢型									钢型	不锈钢型	Cr(动) kN	Cor(静) kN		D _s (min.)	d _h (max.)	R (max.)	钢型	不锈钢型
R51100	RS51100	10	0 -0.008	24	0 -0.013	11	9	0 -0.075	0.3	10.1	14	5	6.96	6700	18	16	0.3	19	21
R51200	-	-		26		12	11		0.6	12.8	17.1	-	-	6000	20	16	0.6	28	-
R51101	RS51101	12		26		13	9		0.3	10.4	15.4	5.15	7.7	6700	20	18	0.3	21	23
R51201	-	-		28		14	11		0.6	13.3	19	-	-	5600	22	18	0.6	31	-
R51102	RS51102	15	0 -0.008	28	0 -0.016	16	9		0.3	10.6	16.8	5.25	8.38	6300	23	20	0.3	23	24
R51202	-	-		32		17	12		0.6	16.7	24.8	-	-	5000	25	22	0.6	43	-
R51103	RS51103	17		30		18	9		0.3	11.4	19.5	5.39	9.07	6000	25	22	0.3	25	26
R51203	-	-		35		19	12		0.6	17.3	27.3	-	-	4800	28	24	0.6	50	-
R51104	RS51104	20	0 -0.010	35	0 -0.016	21	10		0.3	15.1	26.6	7.11	12.36	5300	29	26	0.3	37	40
R51204	-	-		40		22	14		0.6	22.5	37.5	-	-	4300	32	28	0.6	77	-
R51105	RS51105	25		42		26	11		0.6	19.7	37	9.76	18.63	4800	35	32	0.6	56	60
R51205	-	-		47		27	15		0.6	28	50.5	-	-	3800	38	34	0.6	111	-
R51106	RS51106	30	0 -0.010	47	0 -0.019	32	11		0.6	20.6	42	10.2	21.08	4300	40	37	0.6	64	69
R51206	-	-		52		32	16		0.6	29.5	58	-	-	3400	43	39	0.6	137	-


推力滚针轴承

钢型

产品特点: 可用于需要高载荷、高转速、高旋转精度的场合。



代号	类型	材质
AXK □	钢型	GCr15



带保持器滚针

止推圈

订购编号示例

1 代号

AXK0821

1 代号	带保持器滚针										止推圈 × 2				许用转速 rpm (参考)	重量 g (参考)	基本额定负载	
	d	d 公差	D	D 公差	B	B 公差	F	F ₁	d ₁	d ₁ 公差	D ₁	D ₁ 公差	B ₁	B ₁ 公差			Cr(动) kN	Co(静) kN
AXK0414	4	+0.140 +0.020	14	-0.095 -0.365	2	0 -0.01	13	5	4	+0.200 +0.020	14	-0.032	1	+0.05 -0.05	5200	2.7	4.4	8
AXK0515	5		15	-0.365			14	6	5		15	-0.302			5200	2.8	4.75	9.2
AXK0619	6	+0.175 +0.025	19	-0.110 -0.440			18	7	6	+0.245 +0.025	19	-0.040			4700	5	6.8	15.5
AXK0821	8		21	-0.440			20	9	8		21	-0.370			4500	6	7.8	19.4
AXK1024	10	+0.212 +0.032	24	-0.110 -0.440			23	12	10	+0.302 +0.032	24	-0.050			4200	9	9.2	25.5
AXK1226	12		26	-0.440			25	14	12		26	-0.440			3700	9	9.9	29
AXK1528	15	+0.250 +0.004	28	-0.120 -0.510			27	17	15	+0.370 +0.040	28	-0.050			3200	10	11.3	36
AXK1730	17		30	-0.510			29	19	17		30	-0.440			3000	12	11.9	39.5
AXK2035	20	+0.250 +0.004	35	-0.130 -0.520			34	22	20	+0.370 +0.040	35	-0.050			2500	15	13.1	46.5
AXK2542	25		42	-0.130			41	29	25		42	-0.440			2100	21	14.7	58
AXK3047	30		47	-0.520			46	34	30		47	-0.440			1800	24	16.3	70

止推圈在交货时会有一些许变形, 以同心圆的方式施加最低 200N 轴向负载即可使其平整。