



标准型


■ 产品特点: 能提供良好的耐磨性及抗磨蚀, 不同级数的钢丝芯令皮带有更好的拖拉力。传动准确、平稳, 具有传动和传送作用。

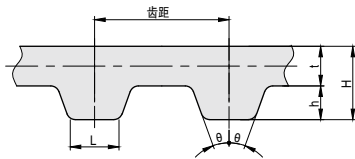

SPXL
SPL
SPH
SPT5
SPT10
SPAT5
SPAT10

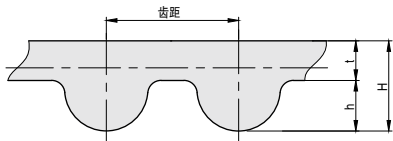

SPH3M
SPH5M
SPH8M

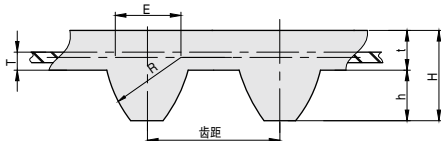

SPS3M
SPS5M
SPS8M

订购编号示例

1 代号 - 2 宽度代号 - 3 齿数
SPXL - 37 - 40

1 代号	2 宽度代号	3 齿数	皮带宽度	许用张力	适用连接金属件
SPXL	025	30~3937	6.4	66	SMPXL-025
	037		9.5	102	SMPXL-037
	050		12.7	142	SMPXL-050
SPL	050	30~2099	12.7	259	SMPL-050
	075		19.1	387	SMPL-075
	100		25.4	519	SMPL-100
SPH	075	45~1574	19.1	397	SMPH-075
	100		25.4	529	SMPH-100
	150		38.1	799	SMPH-150
	200		50.8	1093	SMPH-200
SPT5	10	80~4000	10	112	SMPT5-10
	15		15	166	SMPT5-15
	20		20	225	SMPT5-20
	25		25	284	SMPT5-25
SPT10	15	40~2000	15	299	SMPT10-15
	20		20	397	SMPT10-20
	25		25	529	SMPT10-25
	30		30	627	SMPT10-30
	40		40	862	SMPT10-40
SPAT5	50	80~4000	50	1064	SMPT10-50
	10		10	147	SMPAT5-10
	15		15	221	SMPAT5-15
	20		20	469	SMPAT10-15
	25		25	781	SMPAT10-25
SPAT10	15	50~2000	15	221	SMPAT5-15
	20		20	469	SMPAT10-15
	25		25	781	SMPAT10-25
SPH3M	6	135~6666	6	200	SMPH3M-6
	10		10	300	SMPH3M-10
	15		15	400	SMPH3M-15
SPH5M	10	80~4000	10	470	SMPH5M-10
	15		15	740	SMPH5M-15
	25		25	1280	SMPH5M-20
SPH8M	15	65~2500	15	1620	SMPH8M-15
	20		20	2160	SMPH8M-20
	25		25	2700	SMPH8M-25
	40		40	4320	SMPH8M-40
SPS3M	6	135~6666	6	127	SMPS3M-6
	10		10	106	SMPS3M-10
	15		15	159	SMPS3M-15
SPS5M	10	80~4000	10	215	SMPS5M-10
	15		15	323	SMPS5M-15
	25		25	539	SMPS5M-25
SPS8M	15	65~2500	15	647	SMPS8M-15
	25		25	1176	SMPS8M-20
	30		30	1412	SMPS8M-30
	40		40	1882	SMPS8M-40

皮带种类	齿距	2θ (°)	H	h	t	E	单位重量 g/m (宽度: 10mm)
SPXL	5.08	50°	2.25	1.25	1.0	26.77	22.17
SPL	9.525	40°	3.5	1.9	1.6	37.8	36.22
SPH	12.7	40°	4.3	2.3	2.0	52.36	41.22
SPT5	5	40°	2.2	1.2	1.0	-	22.1
SPT10	10	40°	4.5	2.5	2.0	-	47.6
SPAT5	5	50°	2.7	1.2	1.5	-	32.0
SPAT10	10	50°	4.5	2.5	2.0	-	58.6

皮带种类	齿距	H	h	t	单位重量 g/m (宽度: 10mm)
SPH3M	3	2	1.1	0.9	20.8
SPH5M	5	3.2	1.7	1.5	38.4
SPH8M	8	4.6	2.8	1.8	59.2

皮带种类	齿距	R	E	H	h	t	T	单位重量 g/m (宽度: 10mm)
SPS3M	3	1.95	1.95	2.00	1.14	0.86	0.381	24.3
SPS5M	5	3.25	3.25	3.20	1.77	2.00	0.480	34.6
SPS8M	8	5.20	5.20	5.00	2.85	2.15	0.686	57.6

- ▲ 全长为 (齿数 × 齿距)。
- ▲ 使用温度 0℃ ~ 80℃ (参考值)
- ▲ kgf = N × 0.101972
- ▲ 芯线材质均为高强度钢丝绳芯
- ▲ 许用张力为仅与拉伸负载相关的许用值