







标准型


■ 产品特点: 与 MXL 同步带配套使用, 具有传动准确, 平衡, 噪音小, 无滑差又节能的特点, 而且结构紧凑, 宜于多轴传动, 耐油, 耐潮。与圆弧齿带轮比较, 可以允许更大的线速度, 所以 MXL 可用于较高转速的传动。

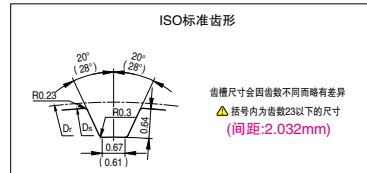

订购编号示例

① 代号 - ② 齿数 - ③ 宽度代号 - ④ 内孔规格 - ⑤ 材料代码 - ⑥ 追加工代码
SMXLHA - 40 - 037 - da10-ds10-S6 - C - 20HT4-M6

① 代号	② 齿数	④ 内孔规格 (单位: 1mm)						Dr	Ds	Df0	Df1		
		SMXLHC	SMXLHK	SMXLHA	SMXLHD								
dc	dk	da	ds	S	dr	dv-dw	E-F						
SMXLHC SMXLHK SMXLHA SMXLHD	14	3-4	2.0 ≤ S ≤ W-2.0 (单位: 0.1mm)	-	-	3-7 E+F ≤ W-3	-	9.06	8.55	13	6		
	15							9.70	9.19	14	7		
	16							10.35	9.84	14	7		
	17	3-5		3	5			11.00	10.49	16	8		
	18							11.64	11.14	16	8		
	19							12.29	11.78	16	8		
	20							12.94	12.43	17	9		
	21	3-6		3-4	5-6			13.58	13.07	17	9		
	22							14.23	13.72	21	12		
	23							14.88	14.37	21	12.5		
	24	3-6-6.35-7-8		3-6	5-8			15.52	15.02	21	12.5		
	25							16.17	15.66	24	12.5		
	26	3-6-6.35-7-9		3-7	5-9			16.82	16.31	24	12.5		
	27	4-6-6.35-7-9		4-7	6-9			17.46	16.96	24	12.5		
	28							18.11	17.60	24	12.5		
	30							19.40	18.90	25	15		
	32	4-6-6.35-7-11		8	4-9	6-11	3-7 E+F ≤ W-3	20.70	20.19	25	15		
	34							21.99	21.48	28	17.5		
	36							23.29	22.78	28	17.5		
	38	5-6-6.35-7-13		8-10	K10-11	5-11		24.58	24.07	30	20		
	40	5-6-6.35-7-15		8-10	K10-11-13	5-13		25.87	25.36	30	20		
	42							27.17	26.66	33	22.5		
	44	5-6-6.35-7-18		8-10	K10-11-16	5-16		28.46	27.95	35	25		
	46	5-6-6.35-7-18		8-10	K10-11-16	7-18		29.75	29.24	35	25		
	48	5-6-6.35-7-20		8-10	K10-11-17	5-18		31.05	30.54	40	27.5		
	50	5-6-6.35-7-27		8-10	K10-11-23	5-25		32.34	31.84	40	27.5		
	60	5-6-6.35-7-27		8-10	K10-11-31	7-27		38.81	38.30	45	31		
	72	5-6-6.35-7-35		8-10	K10-11-31	5-33		46.57	46.06	52	36		



■ 键槽尺寸

基本尺寸		键槽尺寸		
内孔型号	公差	b	JS9	t
8	+0.015	3	±0.0125	1.4
10	0	3	±0.0125	1.4
K10	+0.015	4	±0.0150	1.8
11-12	0	4	±0.0150	1.8
13-17	+0.018	5	±0.0150	2.3
	0	6	±0.0150	2.8
19-22	+0.021	6	±0.0150	2.8
23-30	0	8	±0.0180	3.3
31	+0.025	10	±0.0180	3.3

■ 附件顶丝

孔径	2-M	附件 顶丝
3-5	M3	M3×3
6-18	M4	M4×3
19-21	M5	M5×4

③ 宽度代号	皮带宽度	主要尺寸	
		W	A
019	4.8	10	6
025	6.4	11.5	7.5
037	9.5	15	11
050	12.7	18	14

▲ 挡片已铆接 ▲ 宽度代号为 019、050 的无 45# 材质 ▲ 圆孔、沉孔、两端沉孔不附带螺纹孔和顶丝

■ 追加工类型					
加工螺纹孔 (3 处) TH3	加工螺纹孔 (4 处) TH4	加工螺纹孔 (6 处) TH6	加工通孔 (3 处) SH3	加工通孔 (4 处) SH4	加工通孔 (6 处) SH6

▲ 加工规格详情、指定方法, 请参阅同步带轮追加工技术信息